



**CLASS I**  
(ADJACENT WALKWAY)  
FOR PARK SITES ONLY

3250 PSI CONCRETE PAVEMENT WITH 6"x6" WELDED WIRE MESH OVER 90% COMPACTED NATIVE, OR PERMEABLE CONCRETE PER GEOTECHNICAL ENGINEER'S RECOMMENDATIONS AND AS APPROVED BY THE ENGINEER.

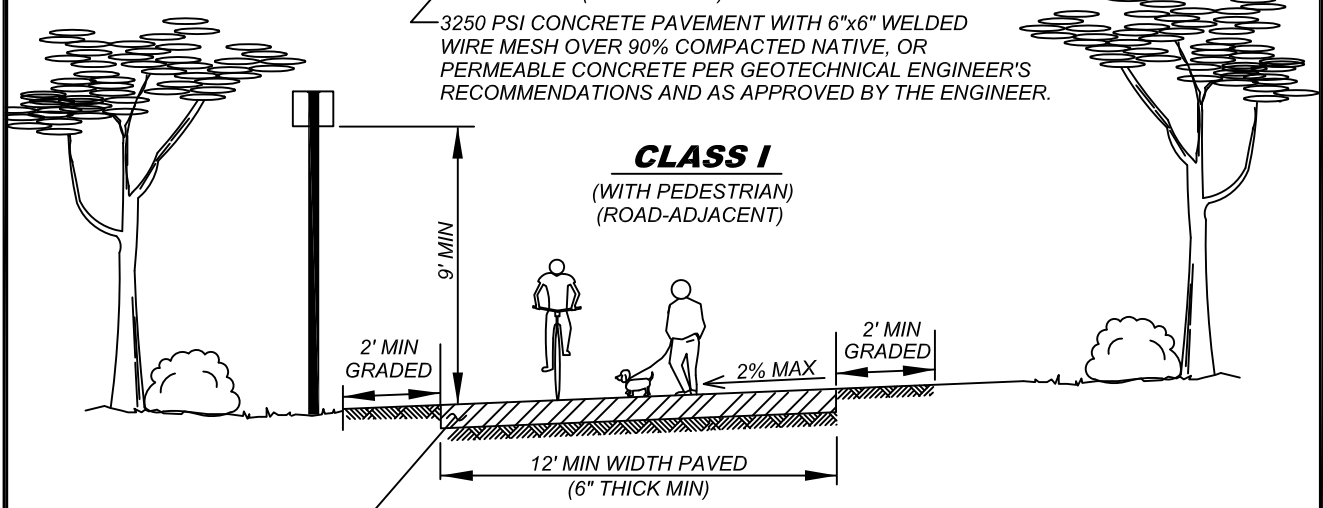

**CLASS I**  
(WITH PEDESTRIAN)  
(ROAD-ADJACENT)

3250 PSI CONCRETE PAVEMENT WITH 6"x6" WELDED WIRE MESH OVER 90% COMPACTED NATIVE, OR PERMEABLE CONCRETE PER GEOTECHNICAL ENGINEER'S RECOMMENDATIONS AND AS APPROVED BY THE ENGINEER.

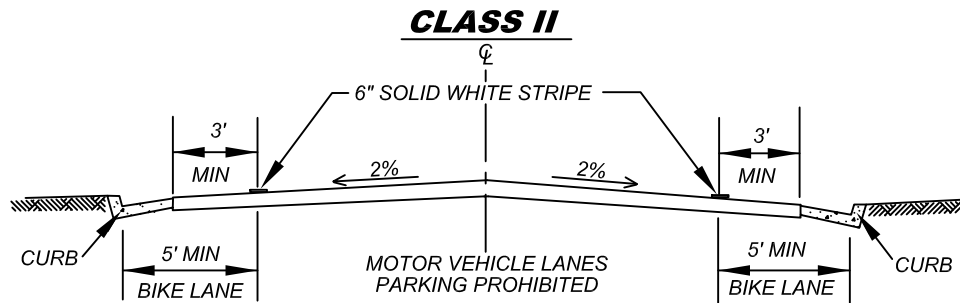

**CLASS II**

**NOTES:**

- 1.) CONCRETE MOW STRIP REQUIRED NEXT TO LANDSCAPE AREAS.
- 2.) CLASS I & II BIKE ROUTES TO BE STRIPED AND DESIGNATED WITH SIGNAGE.
- 3.) CLASS III BIKE ROUTES DESIGNATED WITH SIGNAGE ONLY.

CAPITAL PROJECTS	DATE	1/12
APPROVED BY	DIVISION MANAGER INITIAL	
DEPUTY PUBLIC WORKS DIRECTOR/ ACTING CITY ENGINEER		

**CITY OF MORENO VALLEY**

PREPARED BY CAPITAL PROJECTS

**TWO-WAY BIKE PATH ON  
SEPARATE RIGHT-OF-WAY**

1 of 1

NO.  
**216**