





Locate secondary street name sign on the bottom



NORTH or EAST  
NOT TO SCALE

Street name sign (SNS) post to be a minimum of 36" from face of curb and 5' out from curb return (SNS ONLY)

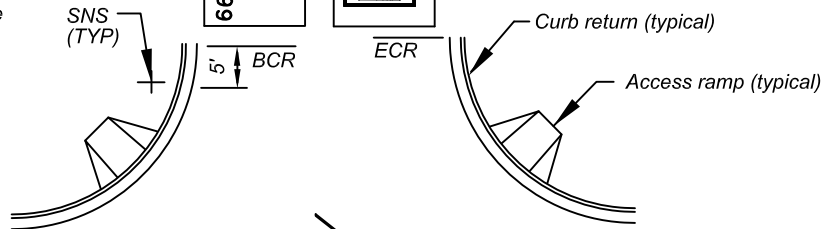

Secondary


Primary

Correct corner location per street classification  
See Standard 400


Use equivalent metric  
Exceptions as approved by City Engineer

Note: Street name signs for intersecting secondary streets do not show address block numbers

Street name signs for intersecting primary and secondary streets, and above, do show address block numbers

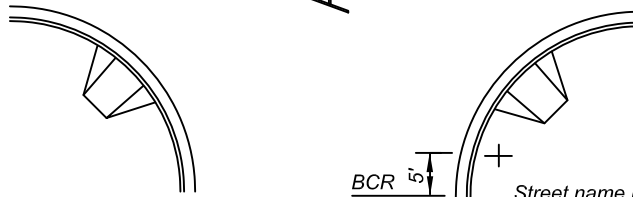

Street name post to be a minimum of 36" from face of curb and 5' out from curb return (SNS ONLY)





Locate secondary street name sign on the bottom

**NOTES:**

1.) ADDRESS BLOCK NUMBER POINTS IN THE LEADING DIRECTION - INCREASING ADDRESS NUMBERS FOR SOUTH AND EAST ( ##000➡ ) AND DECREASING ADDRESS NUMBERS FOR WEST AND NORTH ( ⬅##999 ).

2.) SEE STANDARD 400 FOR CORRECT CORNER LOCATION BASED ON STREET CLASSIFICATION.

TRANSPORTATION		DATE	1/12	CITY OF MORENO VALLEY PREPARED BY CAPITAL PROJECTS	
APPROVED BY		DIVISION MANAGER INITIAL			
 DEPUTY PUBLIC WORKS DIRECTOR/ ACTING CITY ENGINEER				1 of 1	
				STREET NAME SIGN PLACEMENT NO. 404	