


- BAND-IT** - C406 OR EQUAL. 316 STAINLESS STEEL
3/4" OR 19.05mm WIDTH
.030" OR .76mm THICKNESS
- BRACKET** - BAND-IT, DOO1 OR EQUAL. 1 BOLT
STRAIGHT LEG STAINLESS STEEL.
- BUCKLES** - BAND-IT C456 OR EQUAL. EAR LOCKED
316 STAINLESS STEEL 3/4" OR 19.05mm.
- BOLTS** - 1" x 5/16" COARSE THREAD STAINLESS STEEL.
- WASHERS** - ALL SIGNS SHALL BE INSTALLED WITH 5/16" ZINC
COATED WASHERS LARGER THAN THE HEAD OF THE BOLT.
ANY SIGN 24" OR LARGER SHALL BE INSTALLED WITH
WASHERS NO LESS THAN 1" OUTSIDE DIAMETER
ANY SIGN 30" OR LARGER SHALL BE INSTALLED WITH
WASHERS NO LESS THAN 1-1/2" OUTSIDE DIAMETER
(FENDER WASHER)

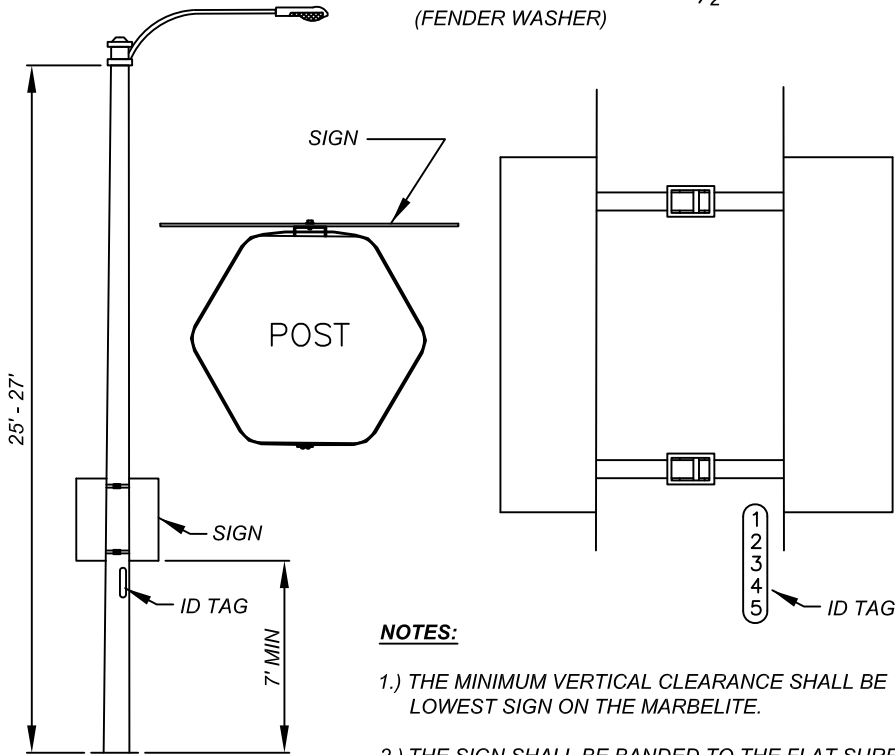

NOTES:

- 1.) THE MINIMUM VERTICAL CLEARANCE SHALL BE 7' TO THE BOTTOM OF THE LOWEST SIGN ON THE MARBELITE.
- 2.) THE SIGN SHALL BE BANDED TO THE FLAT SURFACE OF THE MARBELITE THAT BEST ACCOMMODATES A 90° ANGLE TO ON COMING TRAFFIC UNLESS OTHERWISE SPECIFIED.
- 3.) THE BAND SHALL BE TIGHTENED TO A POINT AT WHICH IT DOES NOT BREAK, YET PREVENTS MOVEMENT BY HAND OF THE SIGN, BAND, OR BRACKET.
- 4.) ALL SIGNS BEING BANDED TO MARBELITE SHALL HAVE NO LESS THAN 2 BANDS (UPPER AND LOWER). ANY SIGN LARGER THAN 36" SHALL HAVE NO LESS THAN 3 BANDS (UPPER, LOWER, AND MIDDLE).
- 5.) UNDER NO CIRCUMSTANCES SHALL THE BANDS COVER THE IDENTIFICATION TAG ON THE MARBELITE.
- 6.) INSTALLATION OF 2 OR MORE SIGNS ON A SINGLE POST SHALL NOT OVERLAP. SIGNS SHOULD HAVE A 1" GAP BETWEEN EACH SIGN.

TRANSPORTATION	DATE	1/10	CITY OF MORENO VALLEY	
APPROVED BY		DIVISION MANAGER INITIAL	PREPARED BY CAPITAL PROJECTS	
		EL	MARBELITE SIGN INSTALLATION	
PUBLIC WORKS DIRECTOR/ CITY ENGINEER			2 of 2 NO. 406B	